

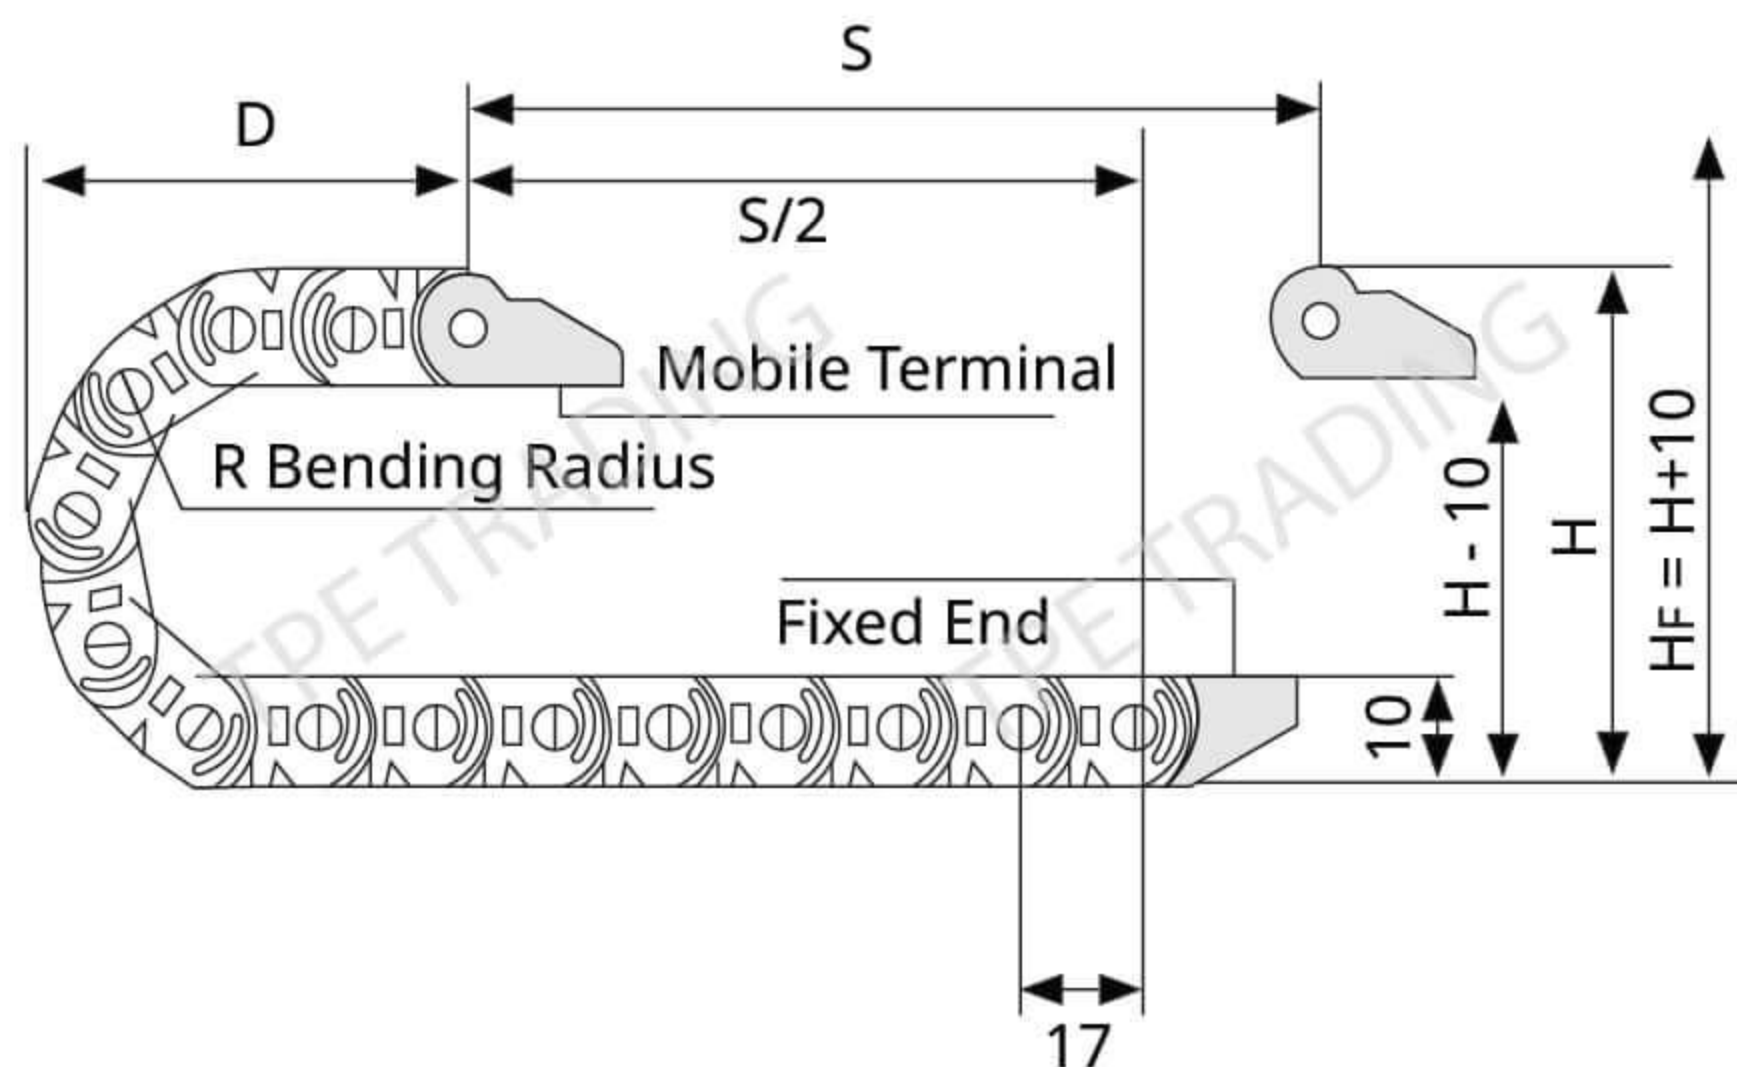


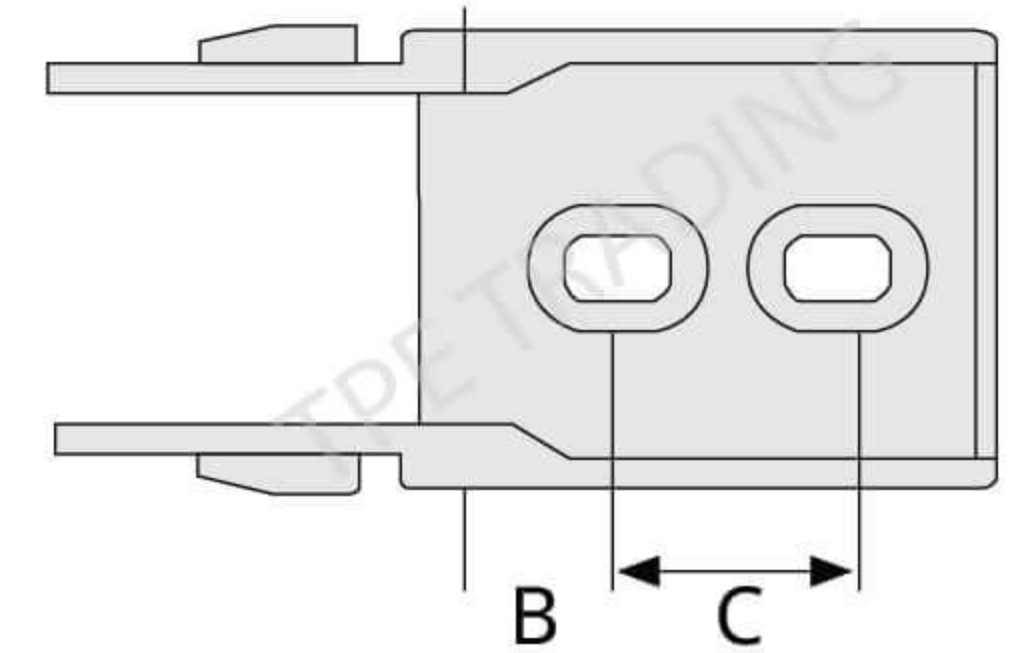

## T6 / T7 / T8 Mini Series

### Product Overview

| Material       | Plastic PA6 |    |    |     |       |           |
|----------------|-------------|----|----|-----|-------|-----------|
| Series         | R           | H  | D  | K   | Pitch | Joints /m |
| 6 Series       | 15          | 39 | 33 | 75  | 13    | 77        |
| 7 Series (R15) | 15          | 40 | 37 | 80  | 17    | 59        |
| 7 Series (R28) | 28          | 66 | 50 | 121 | 17    | 59        |
| 7 Series       | 18          | 47 | 41 | 91  | 16    | 69        |




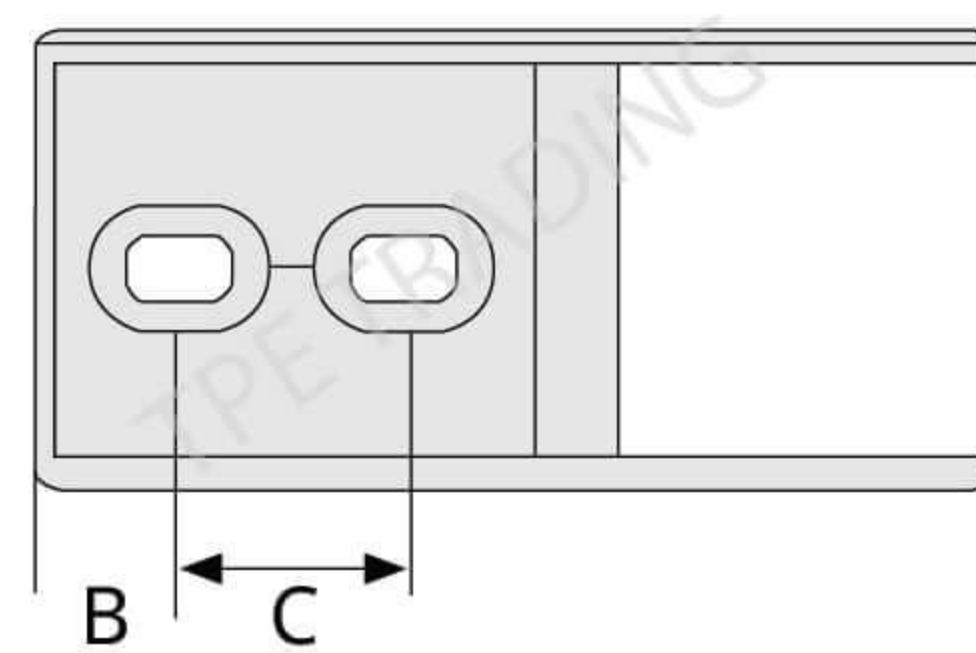


| Model          | Inner Height | Inner Width | Outer Height | Outer Width | Bending Radius(R) | Open Mode               | Aperture  | Corresponding Joint Hole Distance(mm) | Connector Ordering model |
|----------------|--------------|-------------|--------------|-------------|-------------------|-------------------------|-----------|---------------------------------------|--------------------------|
| T6 Mini Series | 6            | 10          | 9            | 15          | 15                | Bridge Open             | 3.2 x 4.7 | B = 5, C = 8                          | 6.10.W.12PZ              |
| T7 Mini Series | 7            | 7           | 10           | 14          | 15, 28            | Bridge Cannot be Opened | 3.0 x 4.5 | B = 5, C = 8                          | 7.7.B.12PZ               |
| T8 Mini Series | 8            | 8           | 11           | 15          | 18                | Bridge Cannot be Opened | 3.5 x 5.0 | B = 5, C = 9                          | 8.8.B.12PZ               |

## T10 Mini Series

### Product Overview

| Material        | Plastic PA6 |    |    |     |       |           |
|-----------------|-------------|----|----|-----|-------|-----------|
| Series          | R           | H  | D  | K   | Pitch | Joints /m |
| 10 Series (R18) | 18          | 51 | 47 | 101 | 20.7  | 49        |
| 10 Series (R28) | 28          | 71 | 57 | 133 | 20.7  | 49        |
| 10 Series (R38) | 38          | 91 | 67 | 164 | 20.7  | 49        |

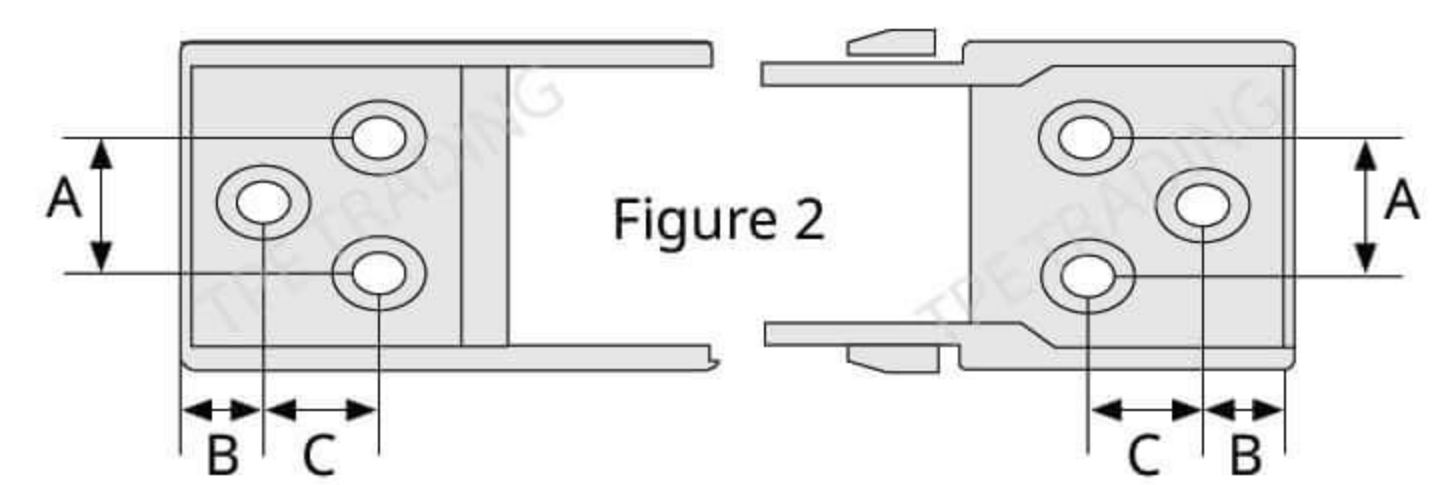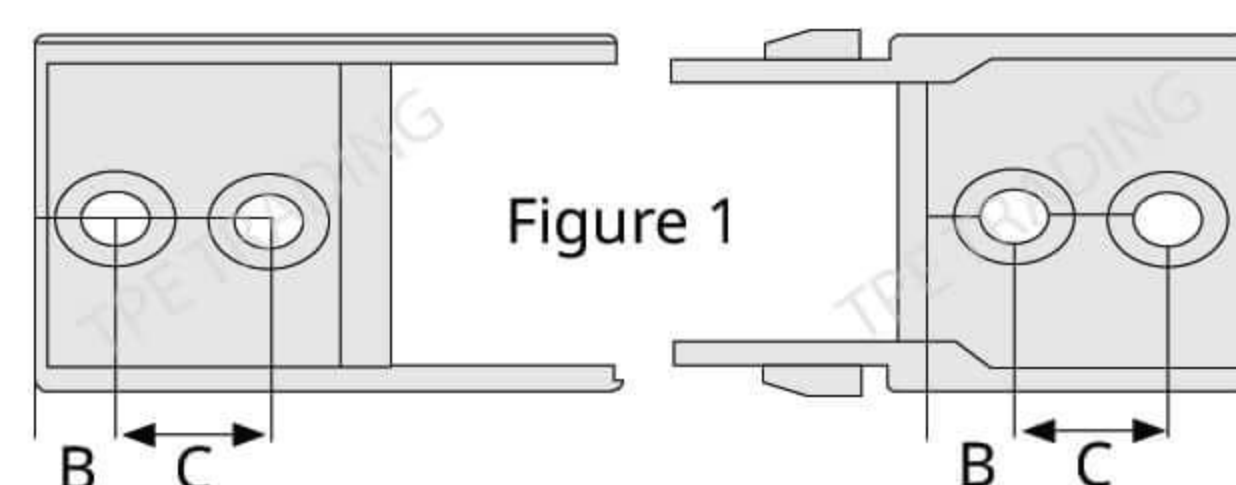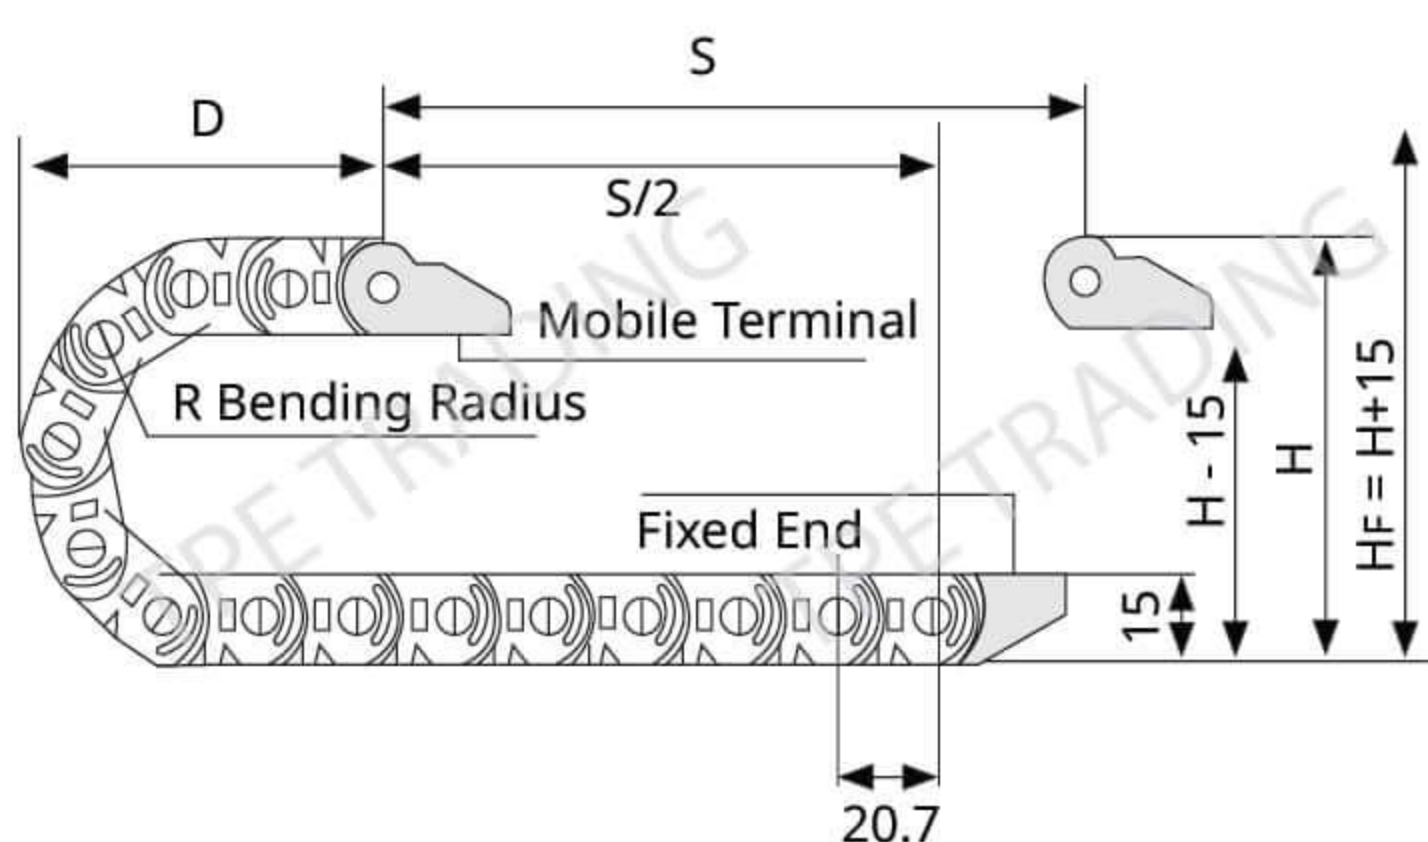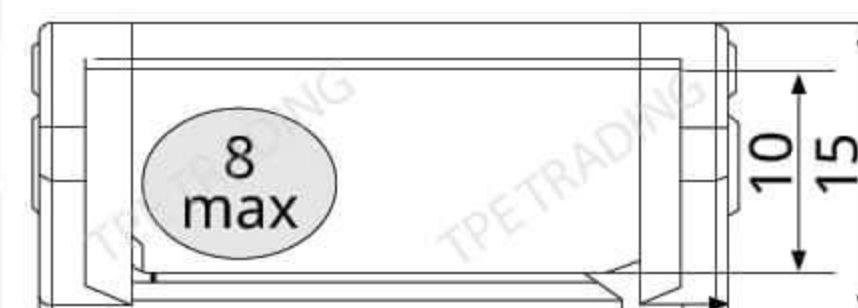

| Model  | Inner Height | Inner Width | Outer Height | Outer Width | Bending Radius(R) | Open Mode               | Aperture | Corresponding Joint Hole Distance(mm) | Connector Ordering model |
|--------|--------------|-------------|--------------|-------------|-------------------|-------------------------|----------|---------------------------------------|--------------------------|
| T10.10 | 10           | 10          | 15           | 18          | 18, 28, 38        | Bridge Cannot be Opened | 4 x 7L   | B = 8, C = 9                          | 10.10.B.12PZ (Figure 1)  |
| T10.15 | 10           | 15          | 15           | 23          | 18, 28, 38        |                         |          | B = 8, C = 9                          | 10.15.B.12PZ (Figure 1)  |
| T10.20 | 10           | 20          | 15           | 28          | 18, 28, 38        |                         |          | A = 12, B = 8, C = 9                  | 10.20.B.12PZ (Figure 2)  |
| T10.30 | 10           | 30          | 15           | 38          | 18, 28, 38        |                         |          | A = 12, B = 8, C = 9                  | 10.30.B.12PZ (Figure 2)  |

**\*\*บริษัทฯ ขอสงวนสิทธิ์การเปลี่ยนแปลงราคา โดยมีต้องแจ้งให้ทราบล่วงหน้า\*\***





**ส่วนลดโปรดติดต่อฝ่ายขาย Tel 02-027-7841, 095-543-5665**

**Email : sales.tpetrading@gmail.com / ID Line : @tpetrading**


T15 Small Series

Product Overview

|            |             |     |     |
|------------|-------------|-----|-----|
| Material   | Plastic PA6 |     |     |
| Pitch      | 20.2 mm.    |     |     |
| Joint / m. | 50          |     |     |
| R          | 28          | 38  | 48  |
| H          | 76          | 96  | 116 |
| D          | 59          | 69  | 79  |
| K          | 140         | 171 | 203 |

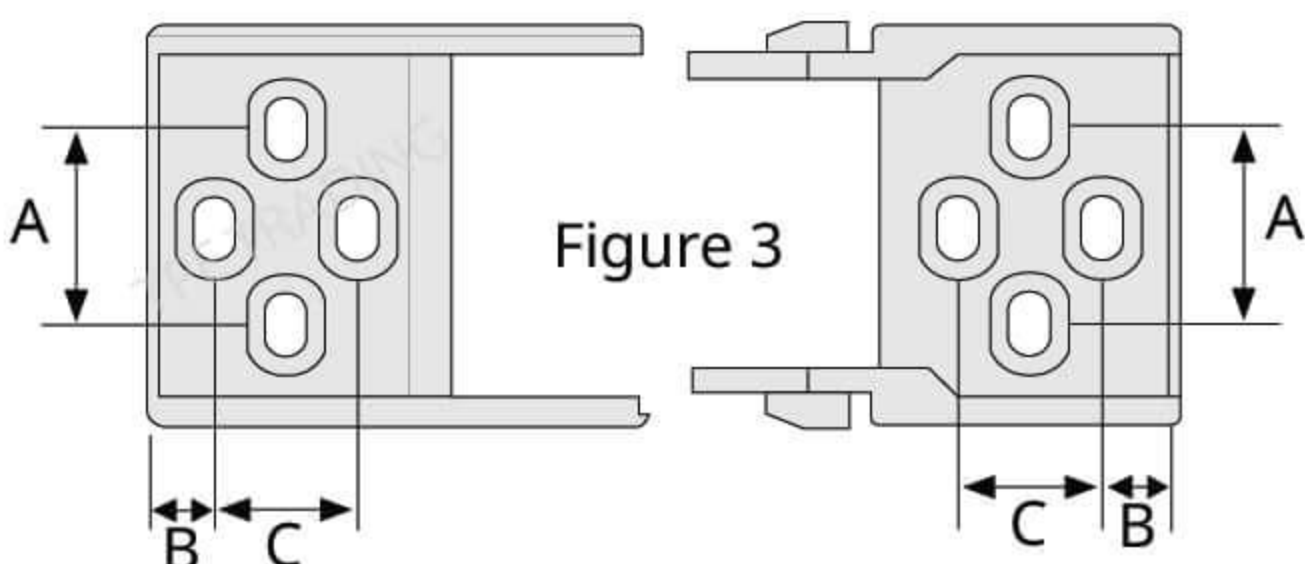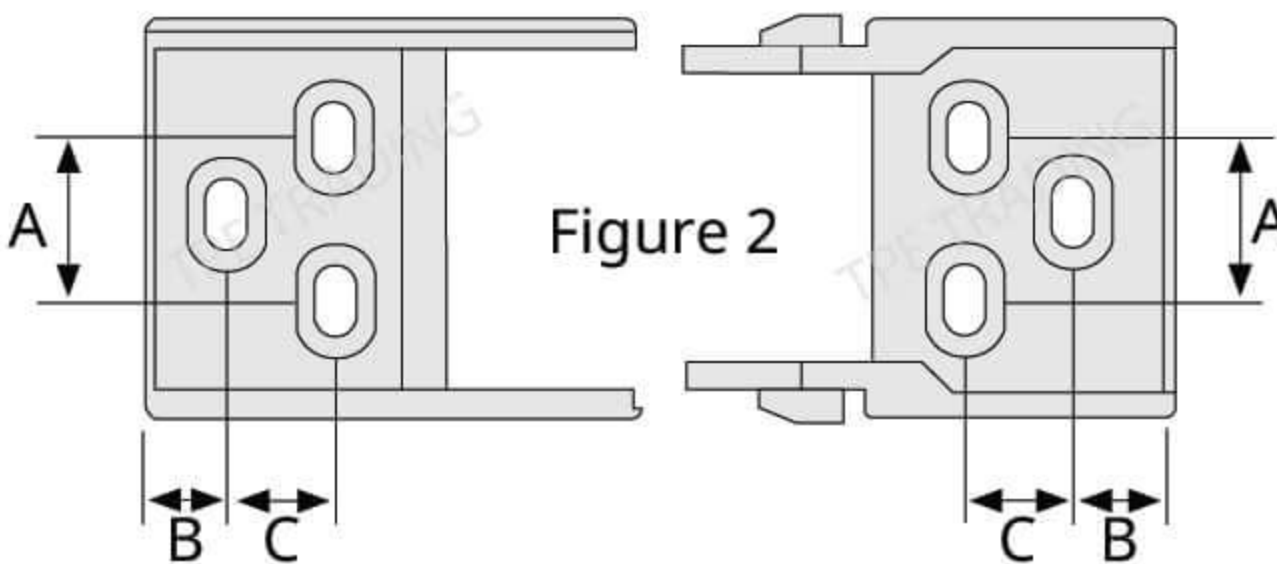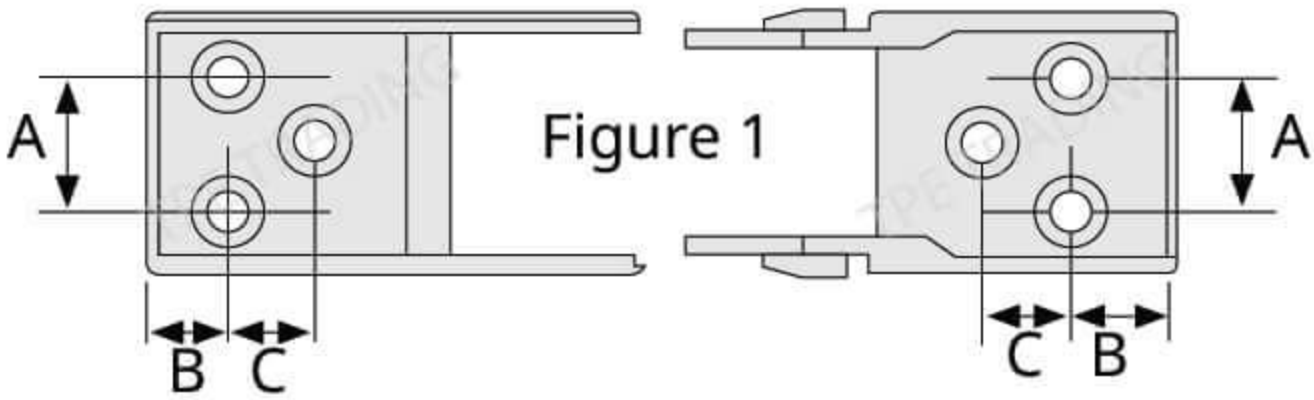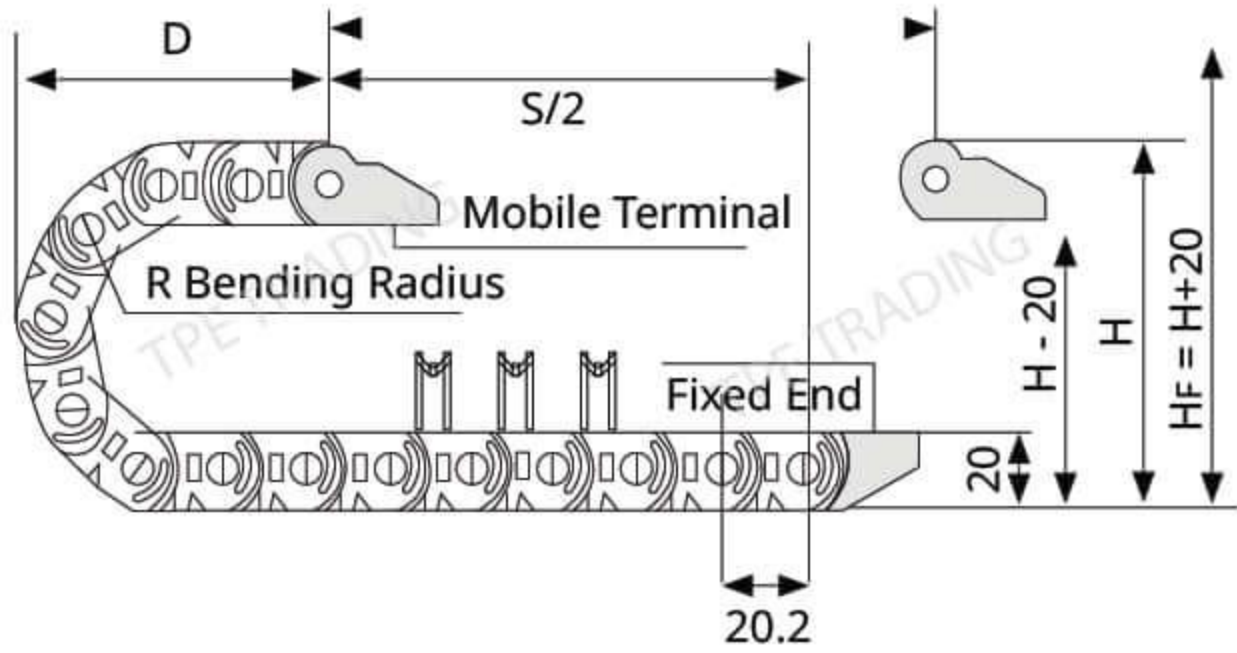




| Model  | Inner Height | Inner Width | Outer Height | Outer Width | Bending Radius(R) | Open Mode   | Aperture | Corresponding Joint Hole Distance(mm) | Connector Ordering model |
|--------|--------------|-------------|--------------|-------------|-------------------|-------------|----------|---------------------------------------|--------------------------|
| T15.15 | 15           | 15          | 20           | 25          | 28, 38, 48        | Semi Closed | 4        | A = 9.5 B = 9.5 C = 6.5               | 15.15.BF.12PZ (Figure 1) |
| T15.20 | 15           | 20          | 20           | 30          | 28, 38, 48        | Semi Closed | 4 x 7L   | A = 10 B = 4 C = 6.5                  | 15.20.BF.12PZ (Figure 2) |
| T15.30 | 15           | 30          | 20           | 40          | 28, 38, 48        | Semi Closed | 4 x 7L   | A = 20 B = 3.5 C = 12                 | 15.30.BF.12PZ (Figure 3) |
| T15.40 | 15           | 40          | 20           | 50          | 28, 38, 48        | Semi Closed | 4 x 7L   | A = 28 B = 4.5 C = 14                 | 15.40.BF.12PZ (Figure 3) |
| T15.35 | 15           | 50          | 20           | 60          | 28, 38, 48        | Semi Closed | 4 x 7L   | A = 10 B = 4 C = 12                   | 15.50.BF.12PZ (Figure 3) |

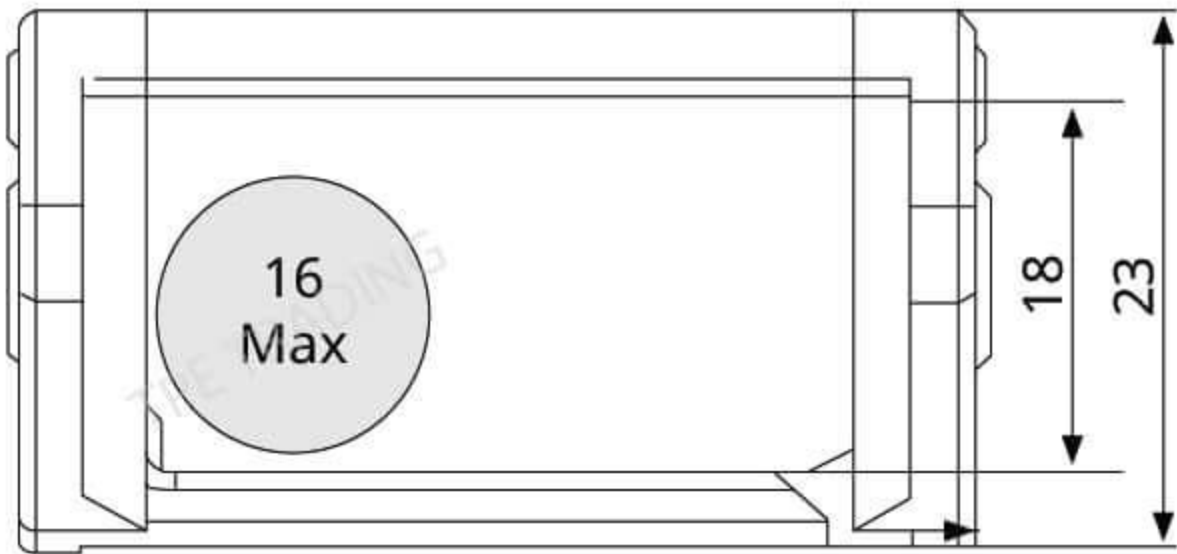

T18 Small Series

Product Overview

|            |             |     |     |     |     |     |     |
|------------|-------------|-----|-----|-----|-----|-----|-----|
| Material   | Plastic PA6 |     |     |     |     |     |     |
| Pitch      | 33.7 mm.    |     |     |     |     |     |     |
| Joint / m. | 30          |     |     |     |     |     |     |
| R          | 28          | 38  | 48  | 55  | 60  | 75  | 100 |
| H          | 79          | 99  | 119 | 133 | 143 | 173 | 223 |
| D          | 74          | 84  | 94  | 101 | 106 | 121 | 146 |
| K          | 158         | 190 | 221 | 243 | 259 | 306 | 384 |

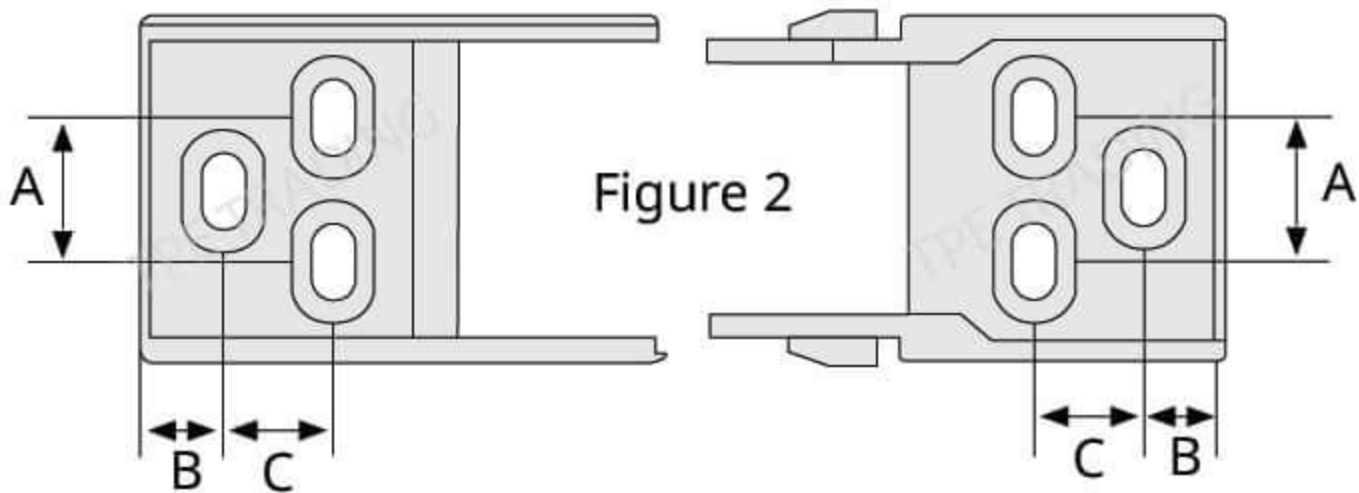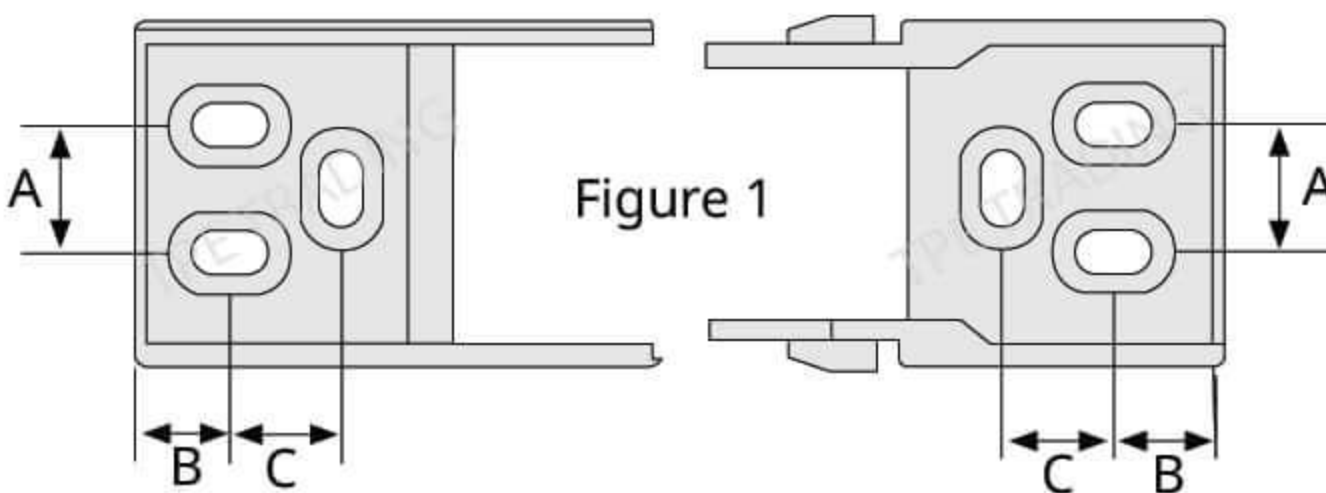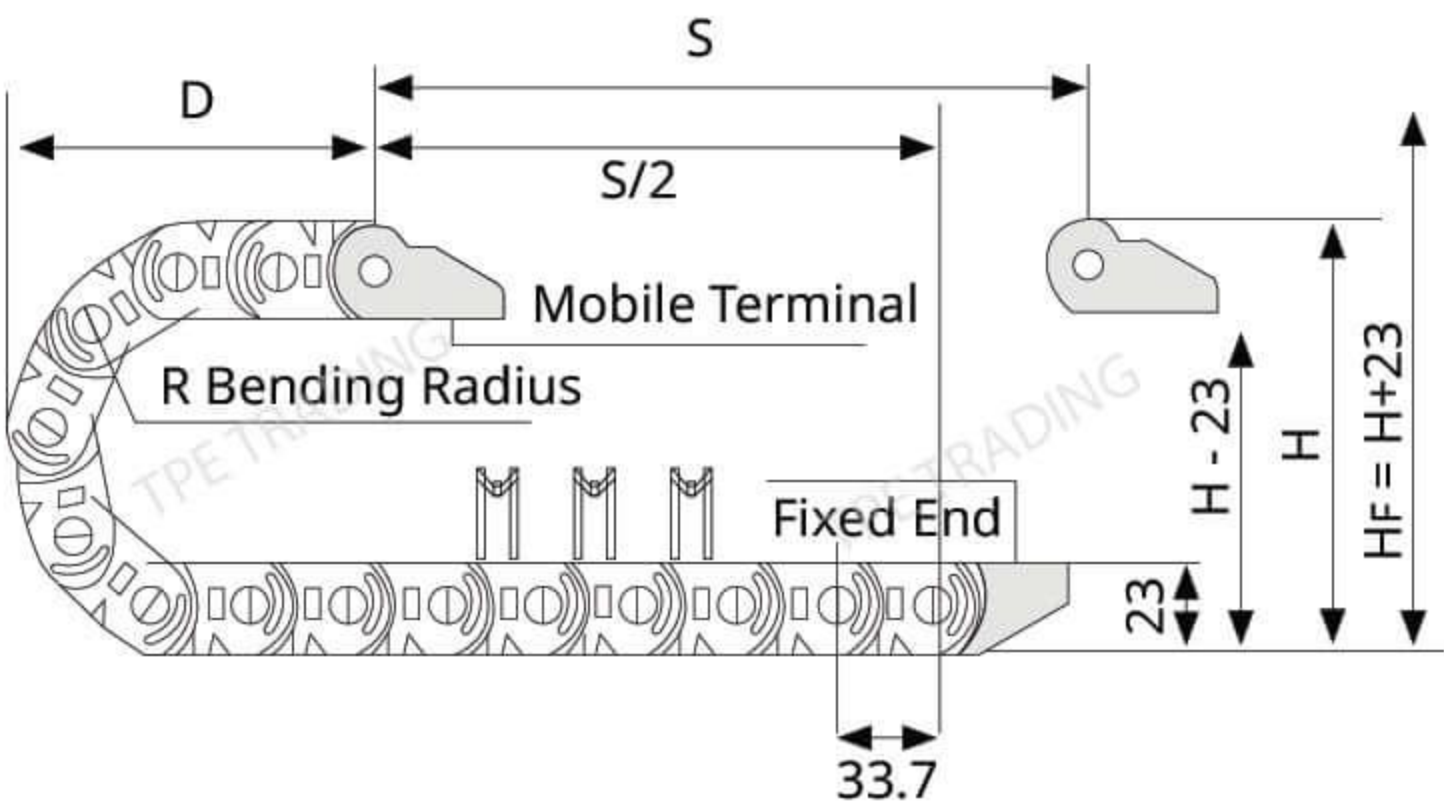

| Model  | Inner Height | Inner Width | Outer Height | Outer Width | Bending Radius(R)           | Open Mode   | Aperture | Corresponding Joint Hole Distance(mm) | Connector Ordering model |
|--------|--------------|-------------|--------------|-------------|-----------------------------|-------------|----------|---------------------------------------|--------------------------|
| T18.18 | 18           | 18          | 23           | 29          | 28, 38, 48, 55, 60, 75, 100 | Semi Closed | 5 x 7L   | A = 8 B = 11.5 C = 9                  | 18.18.BF.12PZ (Figure 1) |
| T18.25 | 18           | 25          | 23           | 36          |                             | Semi Closed | 5 x 8.5L | A = 12 B = 7.5 C = 11                 | 18.25.BF.12PZ (Figure 2) |
| T18.37 | 18           | 37          | 23           | 47          |                             | Semi Closed | 5 x 9L   | A = 24.5 B = 7.5 C = 7.5              | 18.37.BF.12PZ (Figure 2) |
| T18.50 | 18           | 50          | 23           | 60          |                             | Semi Closed | 5 x 9L   | A = 37.5 B = 8 C = 7                  | 18.50.BF.12PZ (Figure 2) |







**\*\*บริษัทฯ ขอสงวนสิทธิ์การเปลี่ยนแปลงราคา โดยมีต้องแจ้งให้ทราบล่วงหน้า\*\***  
ส่วนลดโปรดติดต่อฝ่ายขาย Tel 02-027-7841, 095-543-5665  
Email : sales.tpetrading@gmail.com / ID Line : @tpetrading



## T25 Series

### Product Overview

|            |             |     |     |     |     |     |     |
|------------|-------------|-----|-----|-----|-----|-----|-----|
| Material   | Plastic PA6 |     |     |     |     |     |     |
| Pitch      | 46.4 mm.    |     |     |     |     |     |     |
| Joint / m. | 22          |     |     |     |     |     |     |
| R          | 40          | 55  | 75  | 100 | 125 | 150 | 175 |
| H          | 116         | 146 | 186 | 236 | 286 | 336 | 386 |
| D          | 105         | 120 | 140 | 165 | 190 | 215 | 240 |
| K          | 229         | 276 | 339 | 417 | 496 | 574 | 653 |

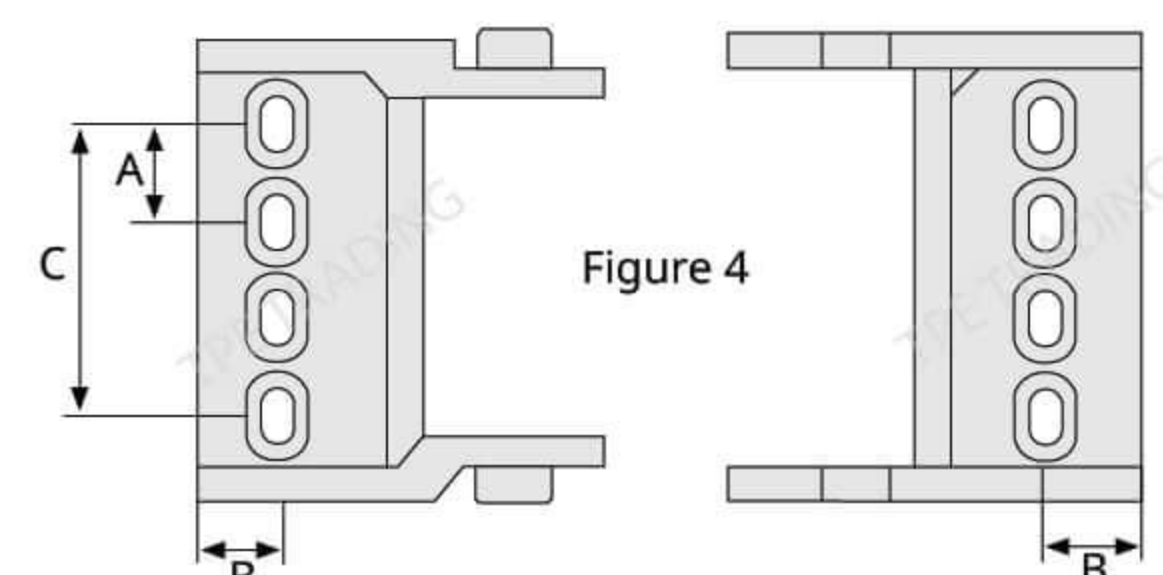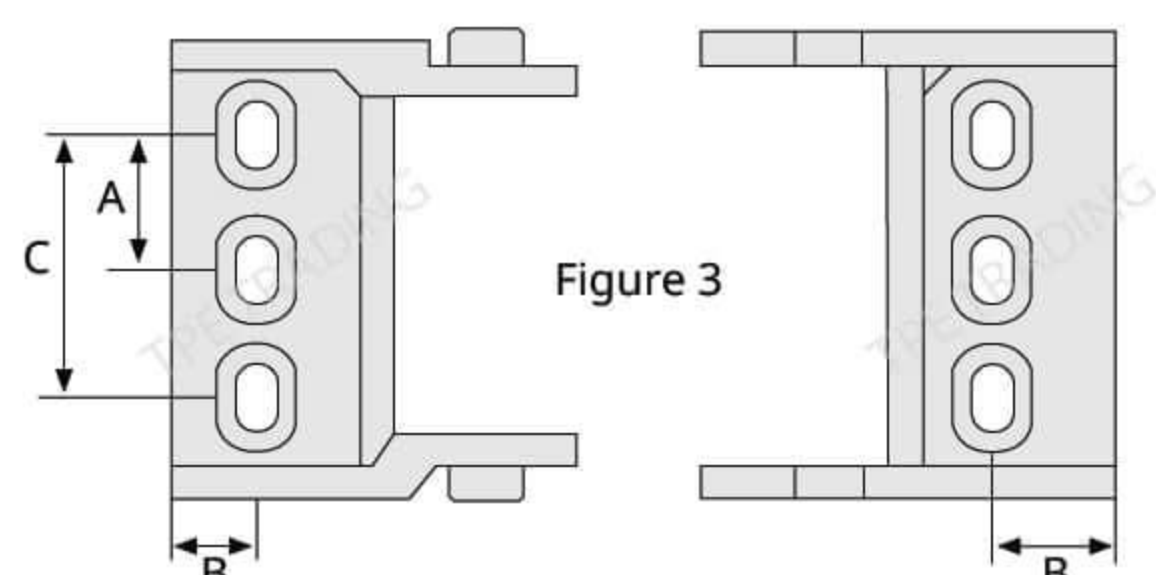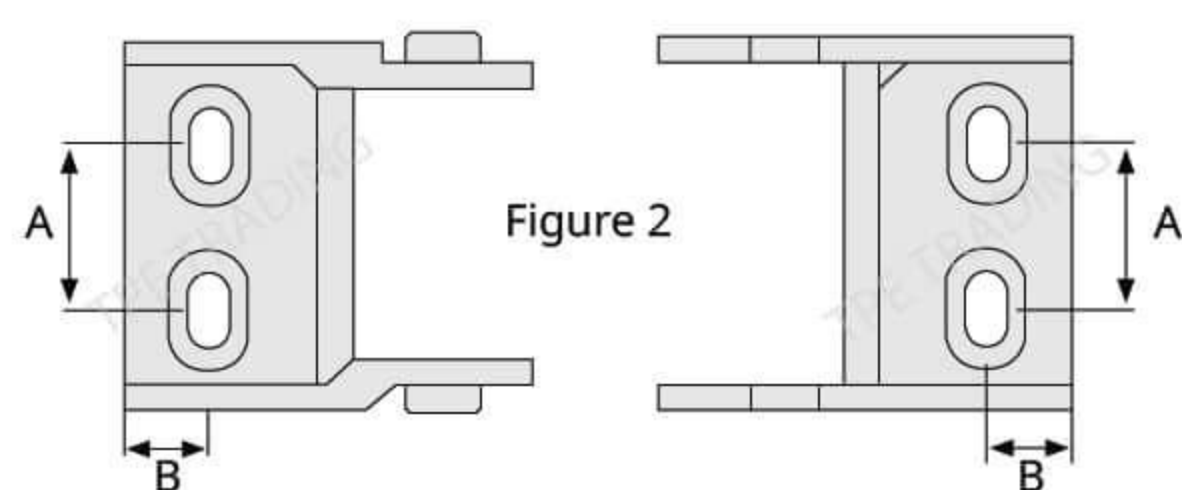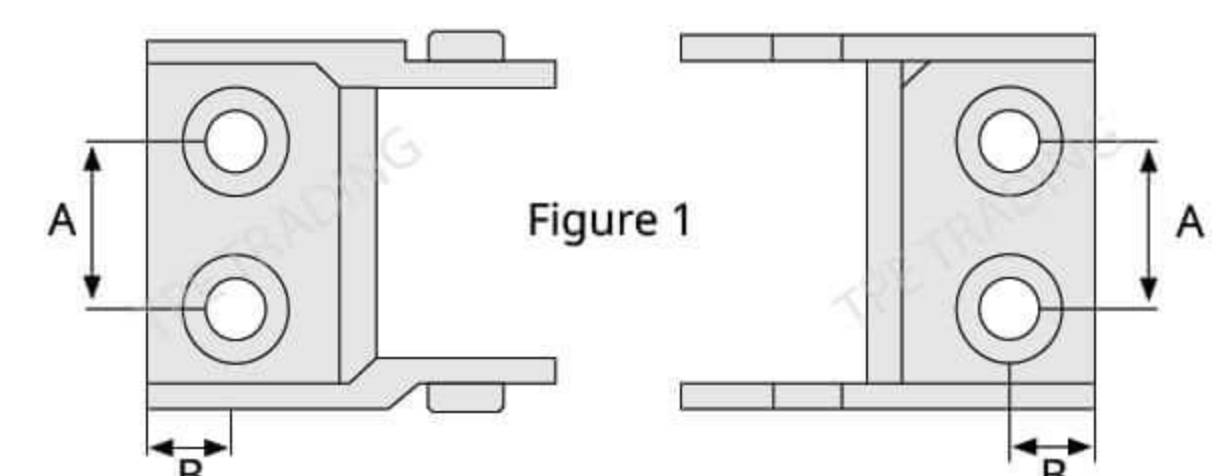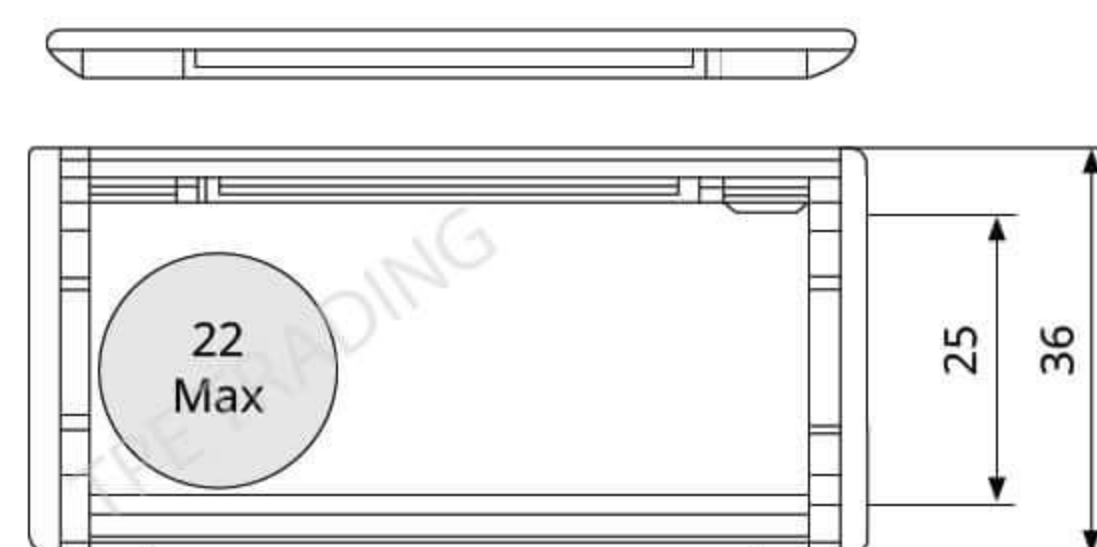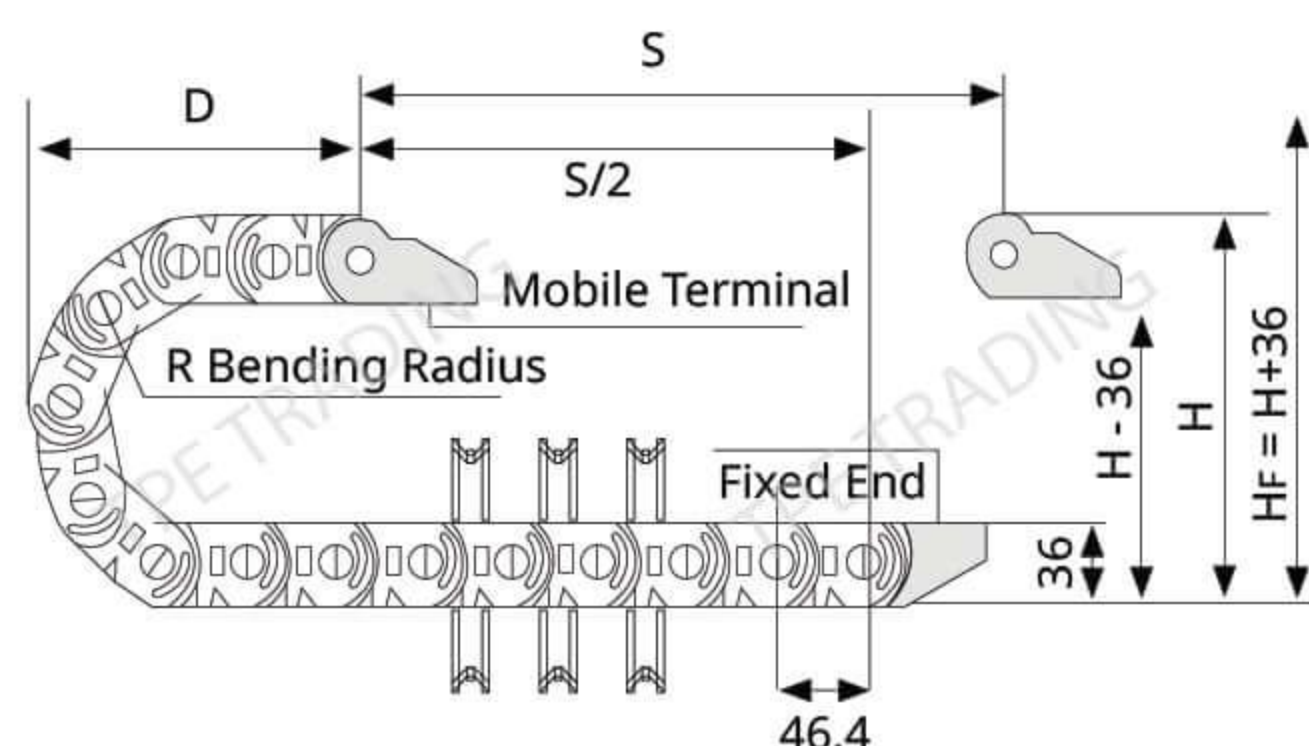

| Model   | Inner Height | Inner Width | Outer Height | Outer Width | Bending Radius(R)                   | Open Mode       | Aperture   | Corresponding Joint Hole Distance(mm) | Connector Ordering model   |
|---------|--------------|-------------|--------------|-------------|-------------------------------------|-----------------|------------|---------------------------------------|----------------------------|
| T25.25  | 25           | 25          | 36           | 40          | 40, 55, 75<br>100, 125,<br>150, 175 | Bridge          | 6.3        | A = 14 B = 11.5                       | 25.25.Q.12PZ (Figure 1)    |
| T25.38  | 25           | 38          | 36           | 53          |                                     | Bridge / Closed | 6.3 x 11.3 | A = 22 B = 11.5                       | 25.38.Q(F).12PZ (Figure 2) |
| T25.50  | 25           | 50          | 36           | 65          |                                     | Bridge / Closed | 6.3 x 16.3 | A = 29 B = 11.5                       | 25.50.Q(F).12PZ (Figure 2) |
| T25.57  | 25           | 57          | 36           | 72          |                                     | Bridge / Closed | 6.3 x 16.3 | A = 36 B = 11.5                       | 25.57.Q(F).12PZ (Figure 2) |
| T25.60  | 25           | 60          | 36           | 75          |                                     | Bridge / Closed | 6.3 x 16.3 | A = 36 B = 11.5                       | 25.60.Q(F).12PZ (Figure 2) |
| T25.77  | 25           | 77          | 36           | 92          |                                     | Bridge / Closed | 6.3 x 16.3 | A = 28 B = 11.5 C = 56                | 25.77.Q(F).12PZ (Figure 3) |
| T25.103 | 25           | 103         | 36           | 118         |                                     | Bridge          | 6.3 x 16.3 | A = 27.5 B = 11.5 C = 82.5            | 25.103.Q.12PZ (Figure 4)   |

**\*\*บริษัทฯ ขอสงวนสิทธิ์การเปลี่ยนแปลงราคา โดยมีต้องแจ้งให้ทราบล่วงหน้า\*\***  
**ส่วนลดโปรดติดต่อฝ่ายขาย Tel 02-027-7841, 095-543-5665**  
**Email : sales.tpetrading@gmail.com / ID Line : @tpetrading**